

Product information

Multilayer wood flooring

DuoPlank[®]




DuoPlank consists of a 14.5 mm water resistant birch plywood and a 5.9 mm solid top layer. This high-quality stable product is perfect for private and project use.

Why DuoPlank?

- High stability thanks to combining 5.9 mm noble wood with 14,5 mm plywood.
- Characteristics and lifetime are comparable to 21 mm solid wood flooring.
- Available in several finishings, both varnished and oiled.
- Easy DIY install.
- Suitable for underfloor heating when glued down to the subfloor, and properly applied. (Please follow the instructions, not suitable for all wood species, ask your dealer for more information. In case of uncertainties please contact your dealer.)

top layer 5,9 mm

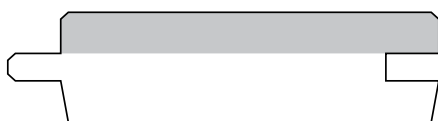

water resistant multiplex 14,5 mm

Technical specifications

Top layer:	5.9 mm
Oak dimensions:	Total thickness 20 mm, width 180 and 240 mm.
Oak selections:	Pr/1-bis, Rustic AB and County.
Others:	Prime
Dimensions in other wood species:	Total thickness 20 mm, width 180 mm and occasionally 160 mm.
Profile:	Tongue and groove and bevelled edges on the long sides.
Finishings:	unfinished, oiled, varnished, brushed, colored, smoked, Scarving Xperience.

More product specifications

Download our PDF at www.inpa.net.

Please turn over for the available DuoPlank Chaco Wood finishings and wood species.

Product specifications

Multilayer wood flooring

DuoPlank[®]

This page shows all available DuoPlank wood species and selections.
Please visit www.inpa.net for a description and characteristics of these wood species.
Other finishings are available on demand.

Afromosia

Afzelia

Oak Country smoked
white wash

Oak brushed, oil natural

Curupixa

Oak mega oil polar
white

Iroko

Sucupira

Ash

Merbau

Walnut

Oak rustic mega brushed
oil castle grey

Oak rustic mega,
smoked, oil castle grey

Oak Rustic mega white
wash

Oak smoked

Teak

Wengé

Zebrano

Your dealer

Product information

Multilayer wood flooring

DuoPlank[®]  CHACO WOOD



DuoPlank Chaco Wood consists of 12 or 15 mm water resistant plywood and a 4 or 5 mm noble wood top layer. This high-quality stable product is perfect for private and project use and is available in 12 different wood species which all originate from South America.


Why DuoPlank Chaco Wood?

- High stability by combining 4 or 5 mm noble wood with 12 or 15 mm plywood.
- Characteristics and lifetime are comparable to 21 mm solid wood flooring.
- Available in 12 different wood species provides a variety in colours and characteristics.
- Easy DIY install.

Technical specifications:

Dimensions T x W: 16 x 135 mm, 20 x 135 mm and 20 x 180 mm
Length 135 mm width: 450 - 2100 mm
Length 180 mm width: 750 - 2100 mm
Profile: T&G four sides with 2 side bevel (2 mm)
Finishing: unfinished, oiled, varnished, brushed, colored, Scarving Xperience

top layer 4 mm / 5 mm

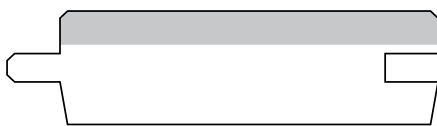

water resistant multiplex 12 mm / 15 mm

More product specifications

Download our PDF at www.inpa.net.

Please turn over for the available DuoPlank finishings and wood species.



This page shows all available DuoPlank Chaco Wood wood species.
Please visit www.inpa.net for a description and characteristics of these wood species.



Curupau



Incienso Colorado

Jatoba



Kurupayra

Morado



Sirari



Tajibo Coffee



Tajibo



Tarara Amarilla



Tarara Colorado



Walnut


Ajunao



Product information

Multilayer wood flooring

TriPlank[©]

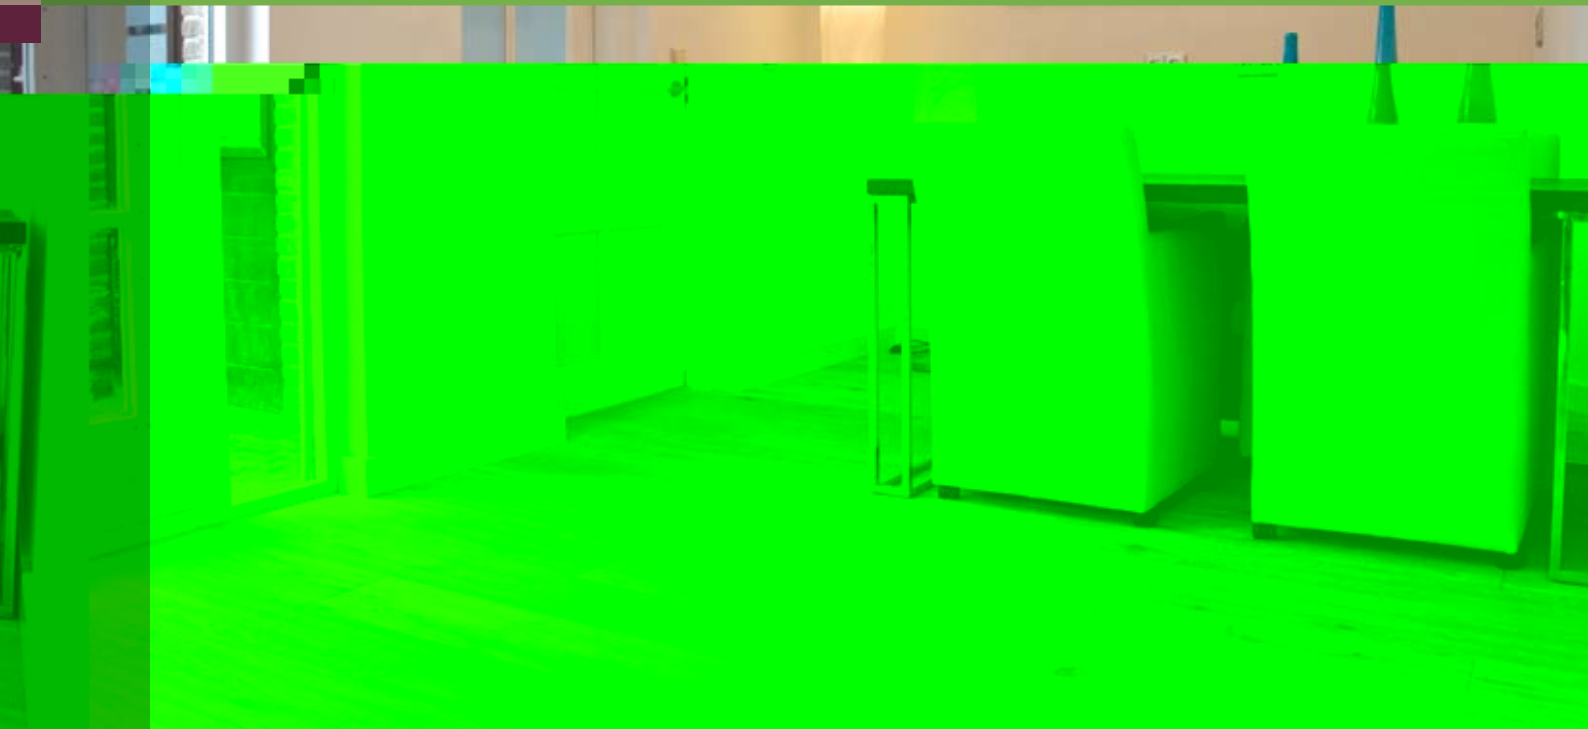

TriPlank consists of a 4 mm solid oak top layer, a softwood middle layer and a back layer of poplar. This 3-layer product is extremely stable and suitable for both floating installation and glueing down to the concrete.


Why Oak TriPlank?

- High stability thanks to multilayering.
- Available in a variety of trendy finishings (oiling and varnishing).
- Easy DIY install.

Technical specifications:

Wood species:	Oak
Top layer:	4 mm
Construction:	Softwood with poplar backlayer.
Selections:	Rustic A, Rustic AB and Rustic Mix.
Dimensions:	15 x 189 x 1830 mm T x W x L.
Finishing:	unfinished, oiling, varnishing, brushing, coloring, smoking and Scarving Xperience.
Packed in:	2,77 m ² box (= 8 pieces, including 1 or 2 nested lengths)

top layer 4 mm

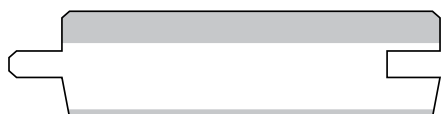

underlayer 10 mm

More product specifications

Download our PDF at www.inpa.net.

Please turn over for the available Oak TriPlank assortment.

Product specifications

Multilayer wood flooring

TriPlank[®]

This page shows all different TriPlank finishings.

Please visit www.inpa.net for a description and characteristics of these wood species.

Other finishings are available on demand.

Oak brushed oil natural

Oak brushed oil white

Oak matt lacquer natural

Oak matt lacquer white

Oak smoked oil natural
Oeral

Oak handscraped oil
white

Oak oil white Siberia

Oak smoked, oil white
Toendra

Your dealer

Product information

Multilayer wood flooring

EcoPlank[®]



Oak EcoPlank consists of 1.8 mm solid oak noble wood top layer glued down on 8.5 mm HDF and has all the characteristics of a wood flooring.

Why Oak EcoPlank?

- High stability thanks to multilayering.
- Available in several trendy finishings.
- Easy DIY install.
- Profitable investment while having all the characteristics of wood flooring.

Technical specifications

Wood species:	Oak
Top layer:	1.8 mm
Construction:	1.8 mm oak top layer glued on HDF carrier.
Profile:	Microbevel on the long sides.
Selections:	Rustic A and Rustic Mix.
Dimensions:	10 x 186 x 1900 mm T x W x L.
Finishing:	unfinished, oiled, varnished, brushed, colored, smoked and Scarving Xperience.
Packed in:	2,12 m ² box (= 6 pieces, including 1 or 2 nested lengths).

top layer 1,8 mm



underlayer 8,5 mm HDF

More product specifications

Download our PDF at www.inpa.net.

Please turn over for the available EcoPlank assortment.

Product specifications

Multilayer wood flooring

EcoPlank[®]

This page shows all different Oak EcoPlank finishings..

Please visit www.inpa.net for a description and characteristics of these wood species.

Other finishings are available on demand.

Oak unfinished

Oak brushed oil natural

Oak brushed oil white

Oak white wash
Siberia

Oak smoked, oil natural
Oeral

Oak smoked, oil white
Toendra

Your dealer

Product information

Multilayer wood flooring

ProjectPlank®



ProjectPlank consists of 15 mm water resistant plywood and a 6 mm solid oak top layer. This high-quality stable product is perfect for private and project use.


Why ProjectPlank?

- High stability thanks to combining 6 mm solid oak and 15 mm plywood.
- Characteristics and lifetime are comparable to 21 mm solid wood flooring.
- Available in a variety of finishings, both varnished and oiled.
- Easy DIY install.

Technical specifications:

Dimensions T x W:	21 x 189 mm, 21 x 220 mm en 21 x 260 mm
Lengths 189 mm:	80% 1860 mm and 20% nested lengths.
Lengths 220 mm:	80% 1860 mm and 20% nested lengths.
Lengths 260 mm:	80% 2400 mm and 20% nested lengths.
Selections:	Prime, Rustic AB and Rustic Mix.
Profile:	Tongue and groove at 4 sides and 2 side bevel at the long sides.
Finishing:	Unfinished, Oiled, varnished, brushed, colored, smoked and Scarving Xperience.
Packed in:	4 pieces per box.

toplayer 6 mm

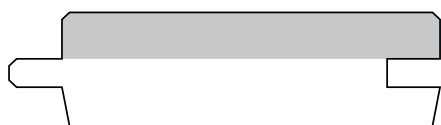

water resistant multiplex 15 mm

More product specifications

Download our PDF at www.inpa.net.

Please turn over for the available ProjectPlank assortment.

This page shows all available Oak Projectplank finishings and selections.
Please visit www.inpa.net for a description and characteristics of these wood species.
Other finishings are available on demand.

Oak Indian smoked

Oak rustic brushed
oil natural

Oak rustic brushed
oil white wash

Oak thermo treated

Oak rustic oil polar
white

Oak smoked oil natural
Oeral

Oak smoked oil white
Toendra

Oak prime natural laquer

Oak prime oil natural

Oak rustic brushed, oil
castle grey

